

Senscient™ ELDS™ Series 2000 H₂S+CH₄ Simultaneous Methane & Hydrogen Sulfide Fulfilling the promise of open path gas detection (OPGD)

About Senscient ELDS OPGD

ELDS™ is a patented, new open path gas detection (OPGD) technology from Senscient. The innovative Enhanced Laser Diode Spectroscopy (ELDS) detection technology featured in our ELDS Series of open path gas detectors truly fulfills the promise of fit-and-forget open path gas detection...

- **Reliable detection of both toxic & flammable gases.**
- **Industry's first false-alarm free Open Path Gas Detector.** ELDS detection is molecular species specific, eliminating false alarms from common atmospheric or non-hazardous gases that plague traditional OPGD (or any NDIR or LDS technology) systems.
- **FIRST and ONLY open path toxic gas detector to meet current industry Safety Performance Standards.**
- **FIRST and ONLY gas detector with SimuGas™, an electronic, remote functionality check.**
- **3 orders of magnitude greater sensitivity for combustible gases versus conventional OP systems.**
- **Up to 60% reduction in gas detection project Cap Ex and COO, with true Fit-&-Forget functionality.**
- **Backed by a network of industry-leading gas detection solutions providers.**



Senscient ELDS Series 2000 H₂S+CH₄ Detector Features / Benefits:

- Reliable, open path detection of both methane and hydrogen sulfide in a single unit.
- Faster response than any other hydrogen sulfide detection technology.
- No need to replace or re-calibrate sensors.
- No false alarms from any other gases including diesel fumes or oil mist.
- True ease-of-installation, with vibration and misalignment tolerant optics.
- SimuGas™ feature provides ability to accomplish on-demand, remote functionality testing right from the control room or PLC!

Applications:

Offshore Platforms, FPSO's, Onshore Petrochemical facilities and Refineries.

Theory of Operation:



Using a separate transmitter and receiver configuration, Senscient ELDS Series 2000 H₂S+CH₄ OPGD systems can detect and measure methane and hydrogen sulfide over distances between 5 and 40 m. The ELDS technique measures the Harmonic Fingerprint introduced onto the transmitter's laser beam(s) by absorption by any target gas in the monitored path.

In the vast majority of instances, hydrogen sulfide is found as a component of the solution gas or natural gas present at the facility, intimately mixed with predominantly methane. When solution gas or natural gas containing hydrogen sulfide leaks, its components do not separate regardless of the density of the individual gases. It remains intimately mixed and the hydrogen sulfide follows the same leak path as the rest of the gas.

Senscient ELDS™ Series 2000 H2S+CH4

Simultaneous Methane & Hydrogen Sulfide

Fulfilling the promise of open path gas detection (OPGD)

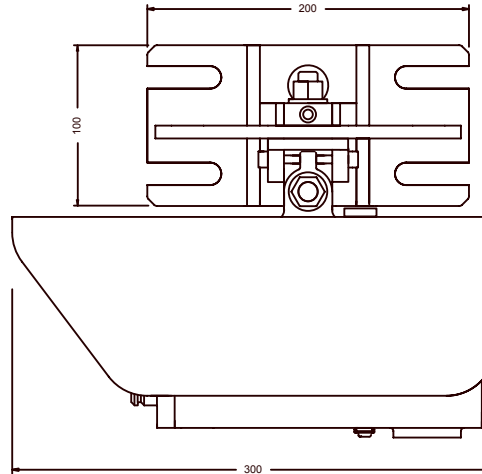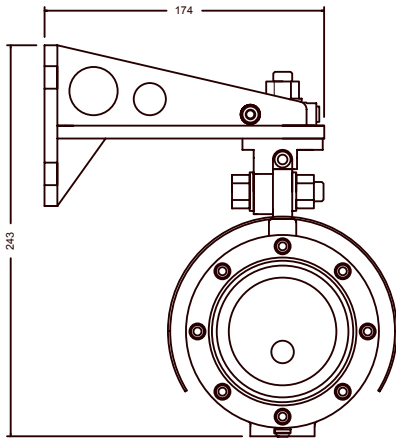

Specifications:

Gas Specifications:	Methane and Hydrogen Sulfide
Gas	Methane and Hydrogen Sulfide (H2S not evaluated by FM)
Methane Ranges	0-1 LEL.m
Hydrogen Sulfide	0-250 ppm.m
Path-Length	5 - 40 m = Short = S

Performance:

Response Time	T90 =< 3 seconds (Methane) T90 =< 5 seconds (Hydrogen Sulfide)
Resolution	0.5% FSD
Repeatability	=< +/- 2% FSD
Linearity	=< +/- 2% FSD
Zero Drift	=< +/- 1% FSD
Span Drift	=< +/- 2% FSD
Min. Alarm Threshold	Methane -10% FSD Sour gas - @ 25 ppm.m

Environmental:

Ingress Protection	IP66, NEMA 4X/6
Enclosure Material	316L stainless steel
Operating Temperature	-40° C to +60° C
Humidity	0 – 100% RH (non-condensing)
Vibration	10 – 150 Hz, 2 g
Meteorological Visibility	Operates @ Met. Visibility >= Path-Length
Certification / Approvals:	Class 1 Div 1 Groups B C & D, (IIB + H2) T5 Tamb = -40° C to +60° C Class 1 Zone 1 AExd/Exd (IIB + H2) T5 Tamb = -40° C to +60° C Supply Entry ¾" NPT - 14 TPI II 2 G, Exd (IIB + H2) T5 Tamb = -40° C to +60° C Supply Entry M25 ATEX under FM Evaluation



Electrical:

Operating Voltage	+24 V nominal, operates correctly for supply voltages between +14 V and +32 V
Power Consumption	TX = 12 W (max), RX = 10 W (max)
Output (Analog 2 O/Ps)	4-20 mA (2 wire, isolated) Configurable for single wire, sink or source Capable of driving 0-600 Ohm load
Low Signal	3 mA (configurable 1 mA to 4 mA)
Beam Block	2.5 mA (configurable 0 mA to 3.5 mA)
Inhibit	2 mA (configurable 1 mA to 4 mA)
Fault	0 mA
Optional Output (Digital)	RS485 (Isolated), MODBUS protocol (Digital outputs not included in FM Performance)

Mechanical:

Size	TX/RX 140 mm dia. x 300 mm
Weight	TX/RX 12 kg each
Mounting	TX & RX units supplied fitted to a mounting bracket which incorporates holes / slots for fixing on flat surfaces or metal poles (4" to 6" diameter - requires U bolts).

Optical:

The unit will operate correctly, without spurious readings or faults during conditions of misalignment or partial obscuration.	
Alignment	+/- 0.5°
Obscuration	>95%
Heated Optics	The window-lenses of the TX and RX units are heated.
Calibration, Testing & Maintenance:	
Calibration	Units supplied factory calibrated for the specified target gas or gases. Units should not require re-calibration in service.

Part Number: S-2013-1